



A Justrite Safety Group Company



# GC 2100

## Pre-Fabricated Liner


Durable and flexible liner technology

### Features

- Geotextile material coated with an impermeable layer of proprietary modified spray elastomer
- State-of-the-art, automated application process ensures a consistent layer of durable protection
- Engineered and tested to resist tearing, puncturing and most chemicals
- Customize size, color and thickness to fit any application

### Benefits

- Lasts longer than HDPE to provide industry-leading environmental protection from spills
- Lays flat for easy installation
- Durable under heavy truck traffic. Maintenance-free, easily cleaned and reused on multiple sites
- Highest customer satisfaction due to design flexibility and fast turnaround on custom orders

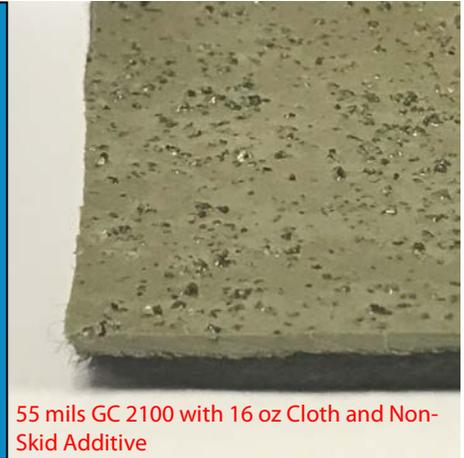

55 mils GC 2100 with 16 oz Cloth and Non-Skid Additive

### Highly cost-effective temporary and permanent containment


GC 2100 liner creates an impermeable protective layer between the environment and hazardous fluids commonly found in oil and gas, mining, and industrial sites. It provides protection against leaks or spills from tanks, pipes and other vessels—simplifying or eliminating the need for remediation.

GC2100 features a proprietary modified elastomeric coating technology applied with a state-of-the-art automated process to ensure the highest level of consistency and coverage per square foot. It maintains impermeability and puncture resistance under exposure to harsh UV and weather extremes, resulting in a long lifespan with minimal maintenance requirements.

Only a single layer of GC 2100 is required instead of multiple layers of HDPE. GC 2100 lays flatter for an easier installation than alternative liners, reducing trip hazards and improving site safety and spill containment. For high traffic applications, GC 2100 can be imbedded with a durable non-slip surface further enhancing its superior performance.

### Proven durability and protection in over 36,000 installations globally

The durability and performance of our revolutionary liner has been proven in more than 36,000 installations. Should a spill occur on the liner, it is contained, so it can be recovered and cleaned easily, avoiding a reportable incident, costly remediation and negative publicity.

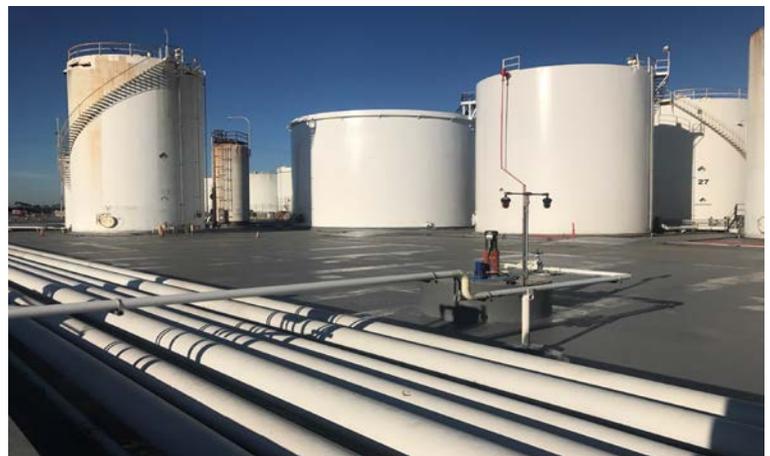

### Flexible, reusable and recyclable

Our pre-sprayed GC 2100 liner is flexible and durable so it can be transported quickly and installed in a variety of applications. The liner can be sized to fit individual equipment, such as trucks, temporary secondary containment for tanks, permanent secondary containment, containment ponds or entire work sites. It can be easily cleaned and trimmed to smaller sizes for subsequent applications. GC 2100 can be spray attached to perimeter materials such as steel, concrete, wood, corrugated pipe or foam to create a seamless containment system. This application eliminates the need for batten bar attachments. GC 2100 contains no VOCs and is chemically inert, which makes it environmentally safe and fully recyclable.

# GC 2100

Durable and flexible liner technology


## Elastomer physical properties

Physical Test	Test Method	Typical Value
Hardness, Shore A	ASTM D-2240	85-90
Tear strength (pli)	ASTM D-624	300-350
Elongation (%)	ASTM D-412	350-500
Tensile strength (psi)	ASTM D-412	1,600-2,800
Taber abrasion (mg wt loss)	ASTM D-4060	1.0* (0.001%)
Static coefficient of friction (wet/dry)	ASTM C-1028	0.77/1.02
Electrical resistance (Ω)	ASTM F-150	10 <sup>12</sup> (insulative)
Permeability (perms)	ASTM E-96	0.05
Permeability (cm/sec)	ASTM D-4491	0 x 10 <sup>-12</sup>
Puncture resistance (lbs) (top side)	ASTM D-751	129
Puncture resistance (lbs) (bottom side)	ASTM D-751	137

\*Abrasion loss: tested at CS17 wheel, 1 kg load, 1,000 cycles

The material used in our proprietary liner retains its properties even after years of exposure to UV light and extreme weather conditions. The maximum recommended long-term exposure temperature is 200°F (93°C).

## Weatherability characteristics

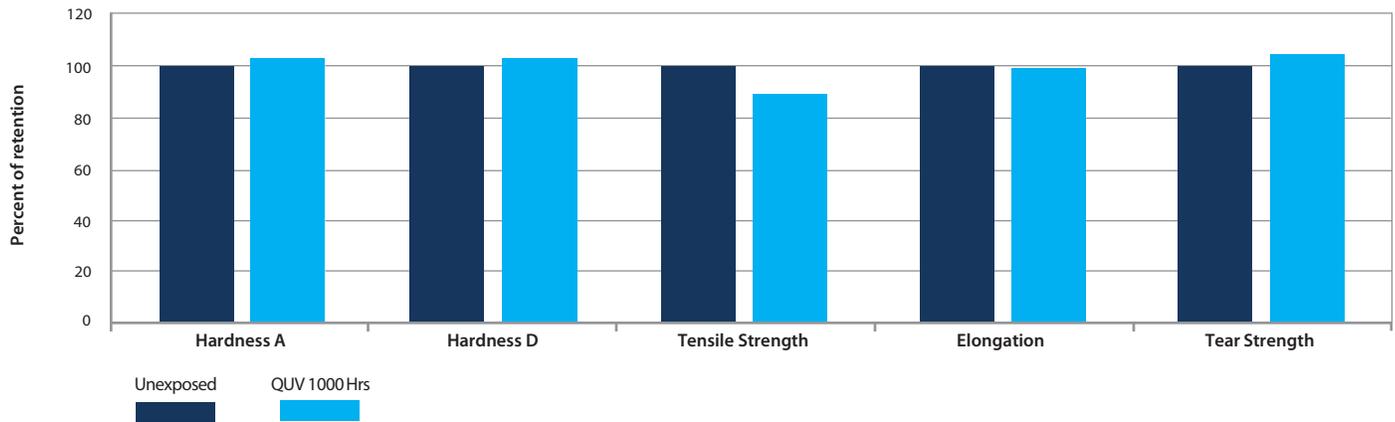

## The most durable liner in the industry

Our high-performance pre-fabricated liner features a proprietary modified elastomeric lining and coating technology that provides a seamless, durable, maintenance-free layer of protection. Weather is not an issue—the liner is UV resistant and retains its properties to -40°F. With a proven useful life of 20+ years, our technology significantly extends asset life, resulting in dramatically reduced maintenance and replacement costs for a much lower total cost of ownership.

Industrial Maintenance Group • 1904 Industrial Park Dr • Plant City, FL 33566  
IndustrialMaintenanceGroup.com • [info@industrialmaintenancegroup.com](mailto:info@industrialmaintenancegroup.com) • 813-659-3512